



SVX 1000 SNOW 2T

100% synthetic ester-based oil for 2-stroke snowmobile engines

USES

100% synthetic oil specifically designed for use in 2-stroke snowmobile engines equipped with carburetors or fuel-injection systems.

Compatible with separated and pre-mix lubrication.

Mixing ratio: 1% to 3%, depending on the manufacturer's requirements.

Specifications:

API TC
JASO FD
ISO-L-EGD


MAIN PHYSICAL DATA

		Methods	Units	Values
Density at	20°C	ASTM D4052	kg/m ³	877
Kinematic viscosity at	40°C	ASTM D445	mm ² /s	79
Kinematic viscosity at	100°C	ASTM D445	mm ² /s	12
Viscosity index		ASTM D2270		147
Pour point		ASTM D97	°C	-51
Cleveland Open Cup Flash Point		ASTM D92	°C	110
Colour				Blue

The data given in this table represents typical production values and should not be taken as specifications.

PROPERTIES & ADVANTAGES

- ▶ Very low pour point, meaning it can be used in separated lubrication systems at low temperatures.
- ▶ Synthetic ester bases provide exceptional resistance to high temperatures, preventing engines from seizing.
- ▶ Excellent anti-smoke properties.
- ▶ Pre-diluted for instant and stable mixing with fuel.
- ▶ Low-ash formula to prevent the formation of deposits in the combustion chamber.
- ▶ Prevents clogged exhaust pipes, ports and pistons.

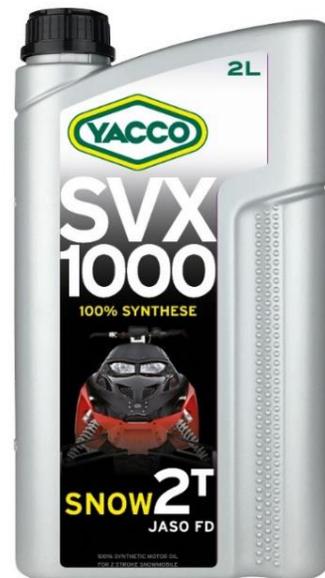

facebook.com/yaccosas

twitter.com/yaccosas

youtube.com

